



SINCE 1980 ISO 9001/14001  
 The Best Solution for Overheating  
 When it comes to overheating, SEKI is always on stanby!



SEKI America: 1512 Artaius Pkwy, Ste 201, Libertyville, IL 60048  
 Phone: (847)281-0308 Fax: (847)737-7518

## BATTERY PROTECTOR

# ST-32

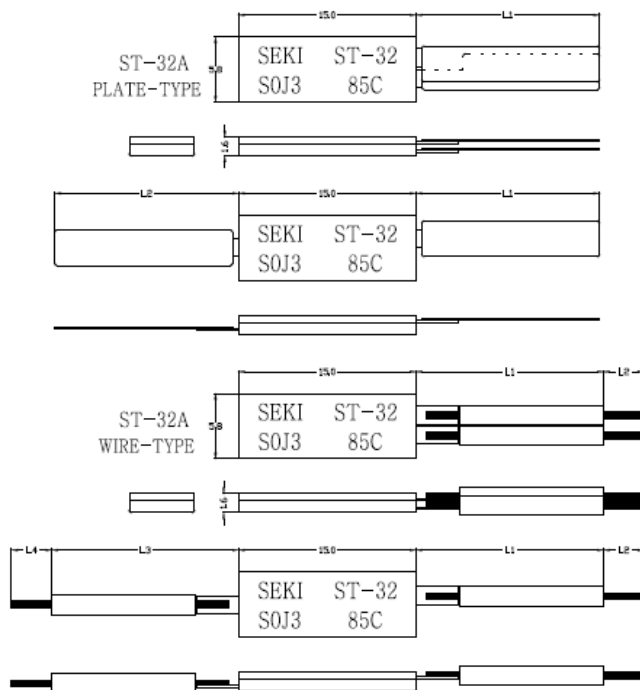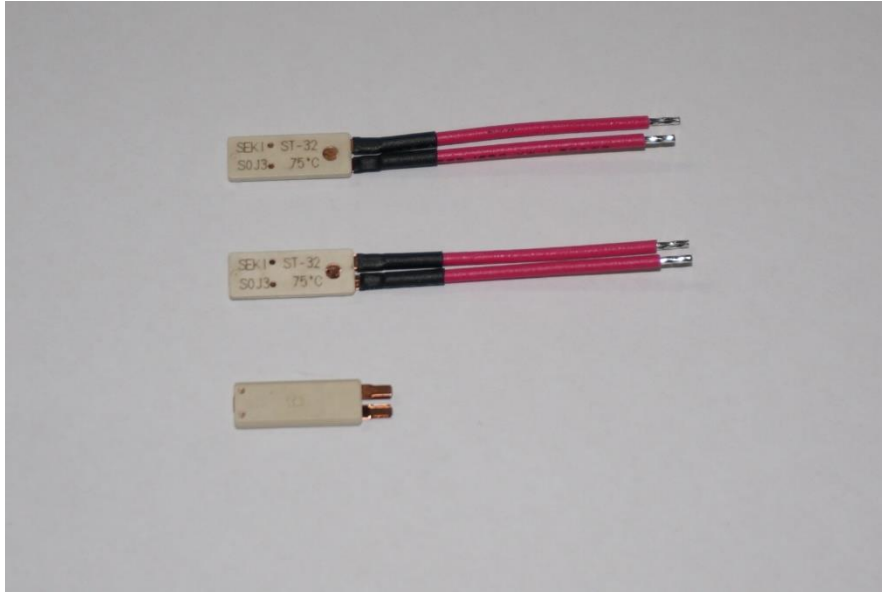

- **TEMPERATUR SETTING RANGE (at no load)**  
45°C to 100°C in increments of 5°C
- **TOLERANCE**  
Indicated Temp.  $\pm 5^{\circ}\text{C}$ ,  $\pm 7^{\circ}\text{C}$ ,  $\pm 10^{\circ}\text{C}$
- **RESET TEMPERATURE**  
30°C or higher
- **WITHSTAND VOLTAGE**  
1,000VAC/ 1min
- **MAXIMUM BRAEKING CURRENT**  
16VDC/ 120A

SINCE 1980 ISO 9001/14001  
 The Best Solution for Overheating  
 When it comes to overheating, SEKI is always on stanby!



SEKI America: 1512 Artaius Pkwy, Ste 201, Libertyville, IL 60048  
 Phone: (847)281-0308 Fax: (847)737-7518

● **FEATURE**

Snap Action, Small Size(15 x 5.8 x 1.6(mm))  
 Superior Heat Response,  
 Optional Self-Holding function

● **RATING**

16VDC/ 12A

● **APPLICATION**

Battery Packs for notebook, video cameras,  
 Potable electric power tools, etc.

● **CONTACT SYSTEM**

Normally closed

● **REFERENCE CHARACTERISTICS** (Ex. Operating temperature 85°C)

