



Preventing hazards due to overheating worldwide.
SEKI is always by your side.





SINCE 1980 ISO 9001/14001

BATTERY PROTECTOR



ST-32

SEKI AMERICA
1512 Artaius Parkway
Libertyville, IL 60048
Tel: (847)281-0308
sales@sekiamerica.com

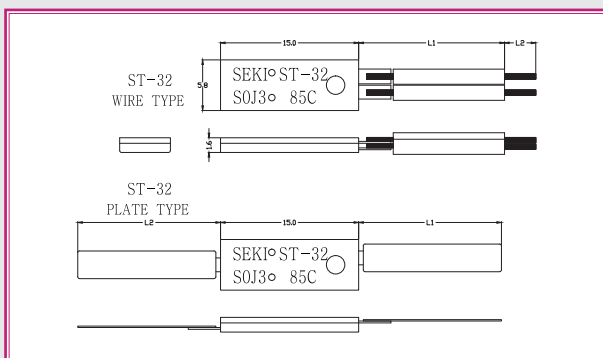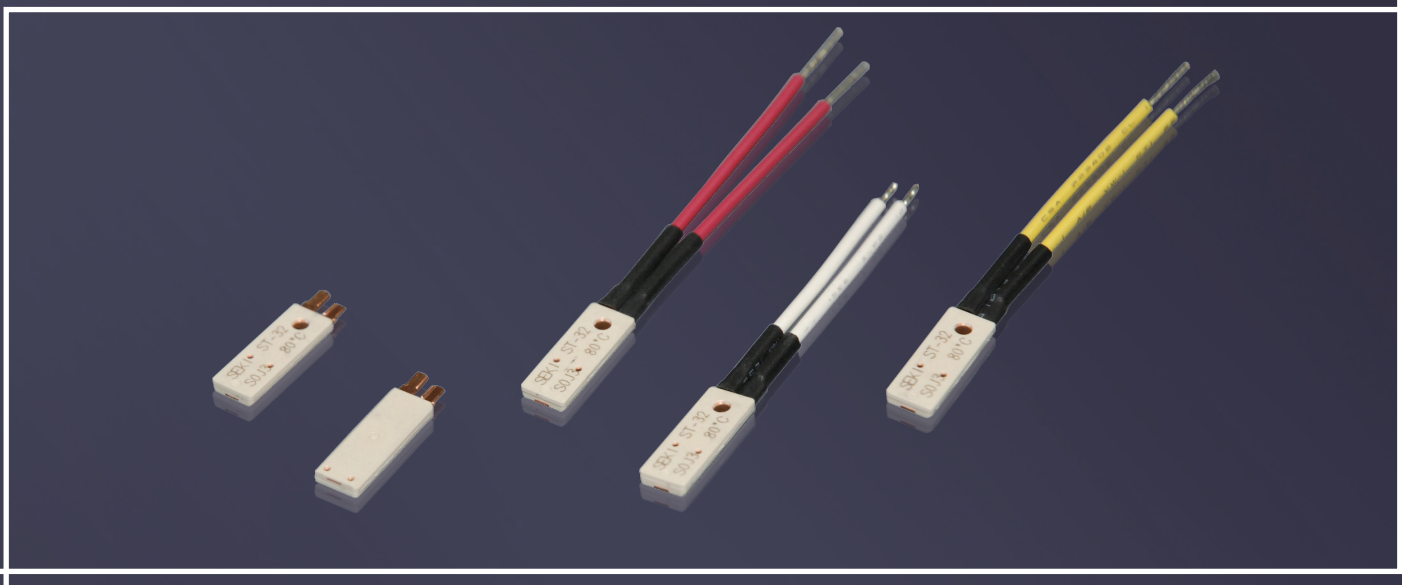

• FEATURE

- Snap Action
- Compact Size (15 x 5.8 x 1.6(mm))
- Superior Heat Response
- Shape Suitable for Battery Packs
- Self-Holding Functioned upon Request

• APPLICATION

Battery Packs for notebook, video cameras, Potable electric power tools, etc.

• TEMPERATURE SETTING RANGE (at no load)

45°C to 100°C in increments of 5°C

• TOLERANCE

Indicated Temp. $\pm 5^\circ\text{C}$, $\pm 7^\circ\text{C}$, $\pm 10^\circ\text{C}$

• RESET TEMPERATURE

30°C or higher

• WITHSTAND VOLTAGE

1,000VAC/ 1min

• MAXIMUM BRAEKING CURRENT

120A/ 16V DC

• RATING

12A/ 16V DC

• CONTACT SYSTEM

Normally closed

• REFERENCE CHARACTERISTICS

(Ex. Operating temperature 85°C)

